

BC-GARD SF EP LINE


A SOLVENT FREE EPOXY COATING, NON TOXIC, POTABLE WATER TANK LINING

DESCRIPTION:

BC-GARD SF EPLINE is a high performance developed specifically a high solids, non-toxic epoxy tank and surface lining. An abrasion resistant for areas potable water tank lining its two components solvent free colored epoxy coating and the glossy finishing are available in a wide range of attractive colors.

PRODUCT FEATURE:

Area of use are for where the subjected to Swimming pools., trolley, water tank, Bunds and water plants, waterwheel, refineries and other industrial plants sectors where chemical resistance and required.

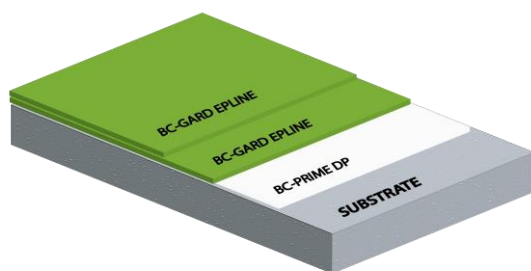

BENEFITS:

- Seamless, monolithic application.
- Solvent Less, Low Odor – and V.O.C
- Hygienic, easy to clean.
- High chemical resistance to wide range of chemicals.
- Abrasion resistant, against medium traffic and trolley movement.
- Hard wearing floors finish
- Wide range of colors
- Complied with BC6920 requirement

COLORS:

- RAL K5 Classic Color Chart

FINISHING:

- Gloss

TECHNICAL DATA

Density (28°C) g/ml ² (mixed)	1.40±0.05g/ml
Adhesive strength	>1.5N/mm ² (Concrete failure)
Tensile strength	15N/mm ²
Number of Coats	2 or 3
Compressive strength (28 days)	50N/mm ²
Flexural strength	35N/mm ²
Shore D hardness	75 ~ 80
Temperature Resistance	up to 80°C
Water Permeability	Nil-Karsten test (impermeable)
Cytotoxicity (2.4 or less)	below <0.5
ASTM D 4060 -10 Taber Abraser	64mg
Wear Index in mg/100 revolutions/1kg	
BS 6920 : Part 1:2000	<2.39 or less
Dissolved Oxygen difference (MDOD),mg/L	
Mixing Ratio by Weight	Part A : Part B 4 : 1
Pot life (working time)	30min
Shelf life & storage (unopened and in good conditions temperature 10°C to 30°C)	12months
Recoating time(28°C)	10 hours min@30°C
Material consumption(mixed)	0.17m ² /kg
Curing time:	

	15°C	25°C	32°C
Human traffic	24hrs	20hrs	18hrs
Light traffic	36hrs	30hrs	24hrs
Fully chemicals cure	10days	7days	7days



BC-GARD SF EP LINE

A SOLVENT FREE EPOXY COATING, NON TOXIC, POTABLE WATER TANK LINING

SUBSTRATE REQUIREMENT & PREPARATION:

Substrate concrete or screed should be a minimum of compressive strength 25N/mm² and adhesive pull-off strength of minimum 1.5N/mm². The substrate should be clean and free from laitance, oil, dust, loose constituents, paint residues, chemicals, algae and other contamination should be removed. The substrate should be dry and free from ground water pressure. If substrate moisture exceeded 4%, apply BC-GARD EM epoxy mortar (compressive strength 60N/mm²) 4-5mm thick or Apply BC-Cem MB 2-3mm thick as a moisture barrier. The substrate must be prepared by vacuum shot blasting, rough contaminations to remove by grinding. Cracks and hollows should be properly remedied. Prepare grooves 3mm wide x 3mm deep at all edges, bay joints columns, doorways and drains for anchoring purpose.

MIXING :

Stir Part A mix for 30 seconds by using a suitable electrical stirrer (with 750 watt High power mixer), then add all of Parts B (Hardener) and mix both liquid parts thoroughly for 2 minute until it fully achieved a homogeneous.

APPLICATION :

- Apply BC-Prime DP @ 0.2kg/m² as a primer for sealing well the substrate porosity.
- Usually within 8-14hours; BC-Prime DP cured, Then only allow to do layering BC-GARD SF EPLINE. Topping onto the BC- Prime DP Primer.
- Apply BC-GARD SF EPLINE within the pot life (working time), can be applied by brush or roller.

TEMPERATURE CONDITIONS OF APPLICATIONS:

- Do not apply when the relative humidity exceeds 90% on when the surface to be coated is less than 5% above the dew point.
- Do not apply temperatures below 5°C and temperatures above 40°C

Maintenance and care after cure :

We recommend basic cleaning and maintenance will prolong the life of epoxy floors, clean regularly using a single or double headed rotary scrubber drier in conjunction with alkaline detergent.

Further Information :

Warning and precautions information relating to the safe handling of this product should be found in Material Safety Data Sheet. To be advise to put on suitable clothing and eye-ware for protection purpose. The application area/site must be in good ventilation otherwise advisable to use a portable exhaust fan.

Important Note :

Best Crete product are warranty against defective materials. Due to different substrate and working conditions, no guarantee of an application result or any liability claims. The users are required to have a test ahead based on their intended use.